


PLUG-IN LINK TYPE HA-LSAEV

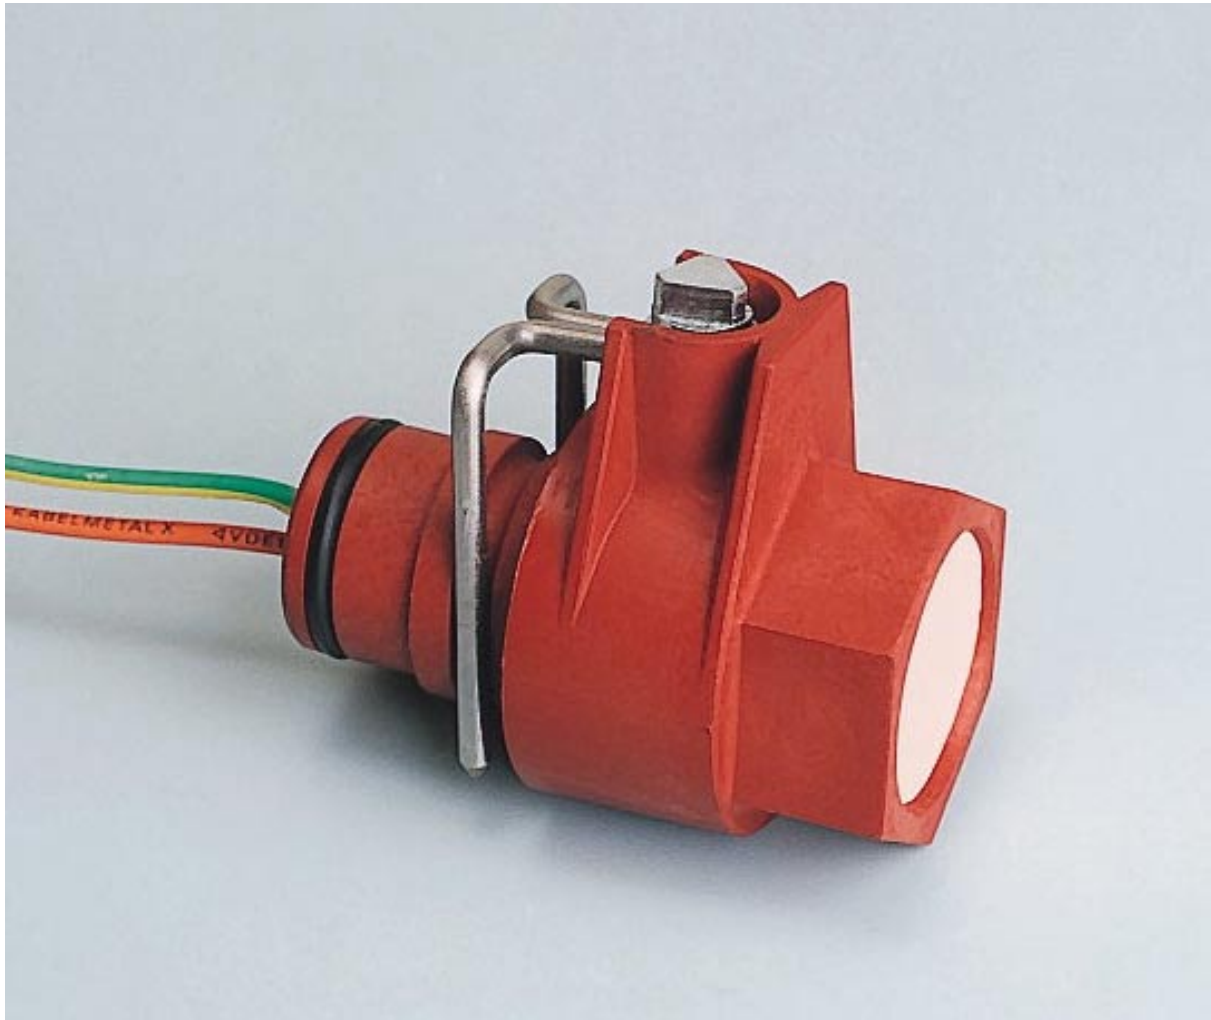

Features

- Terminator with link to attach to housings by means of quick-connection fittings
- Cast resistor-diode combination to terminate a monitoring current circuit (ÜL-PE)

Types of protection

Type of protection: (Sch) s, e
Level of protection: IP 54 (with a suitable housing)

Technical Data

- Designed operating voltage Up to 50 V
- Designed operating current Up to 50 mA
- Length with lead-in section Approx. 78 mm
- Diameter max. Approx. 48 mm

Certification

BVS No. T 6501, PB No.103/84