


HOLDER FOR GAS DISCHARGE ARRESTER

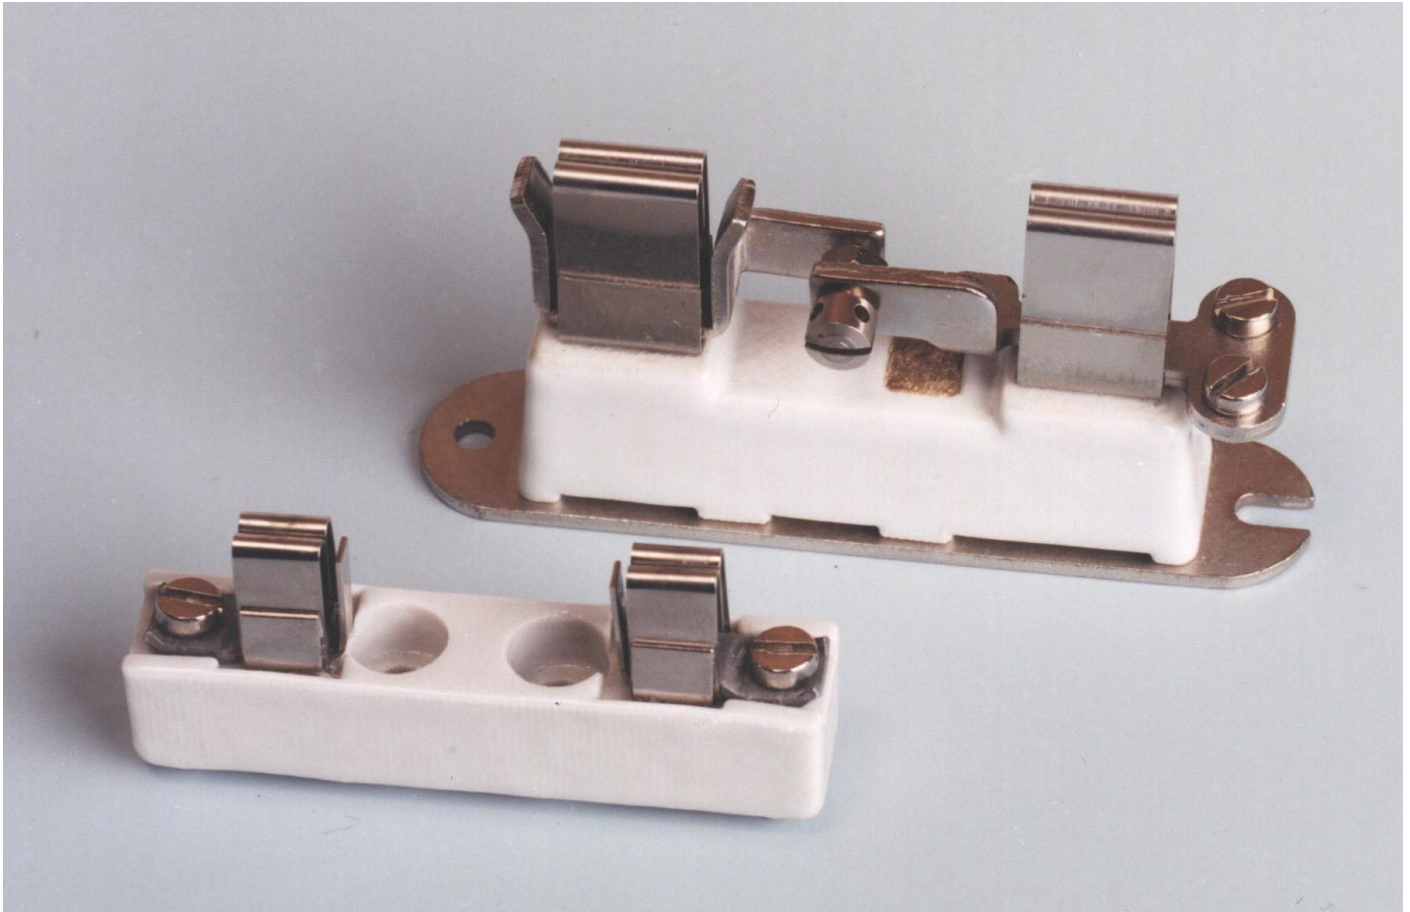

Features

- For gas discharge arresters with contact bars of metal-ceramic or glass tube construction
- For direct installation between the conductor and earth, or in parallel with the item to be protected
- Use of high quality alloys on hard porcelain for the fittings

Technical Data

- Designed for discharge alternating currents up to 40 A
- Designed for discharge surge currents up to 20 kA
- Triggering surge voltages < 2 kV
- Length HA-W 12007 70 mm
HA-W 12008 96 mm
- Weight HA-W 12007 46.5 g
HA-W 12008 124 g