


# HAMACHER QUICK-CONNECTOR TYPE HA-LSA 4A

Cable bushing for casings of equipment group I  
of protection types EExd and EExe

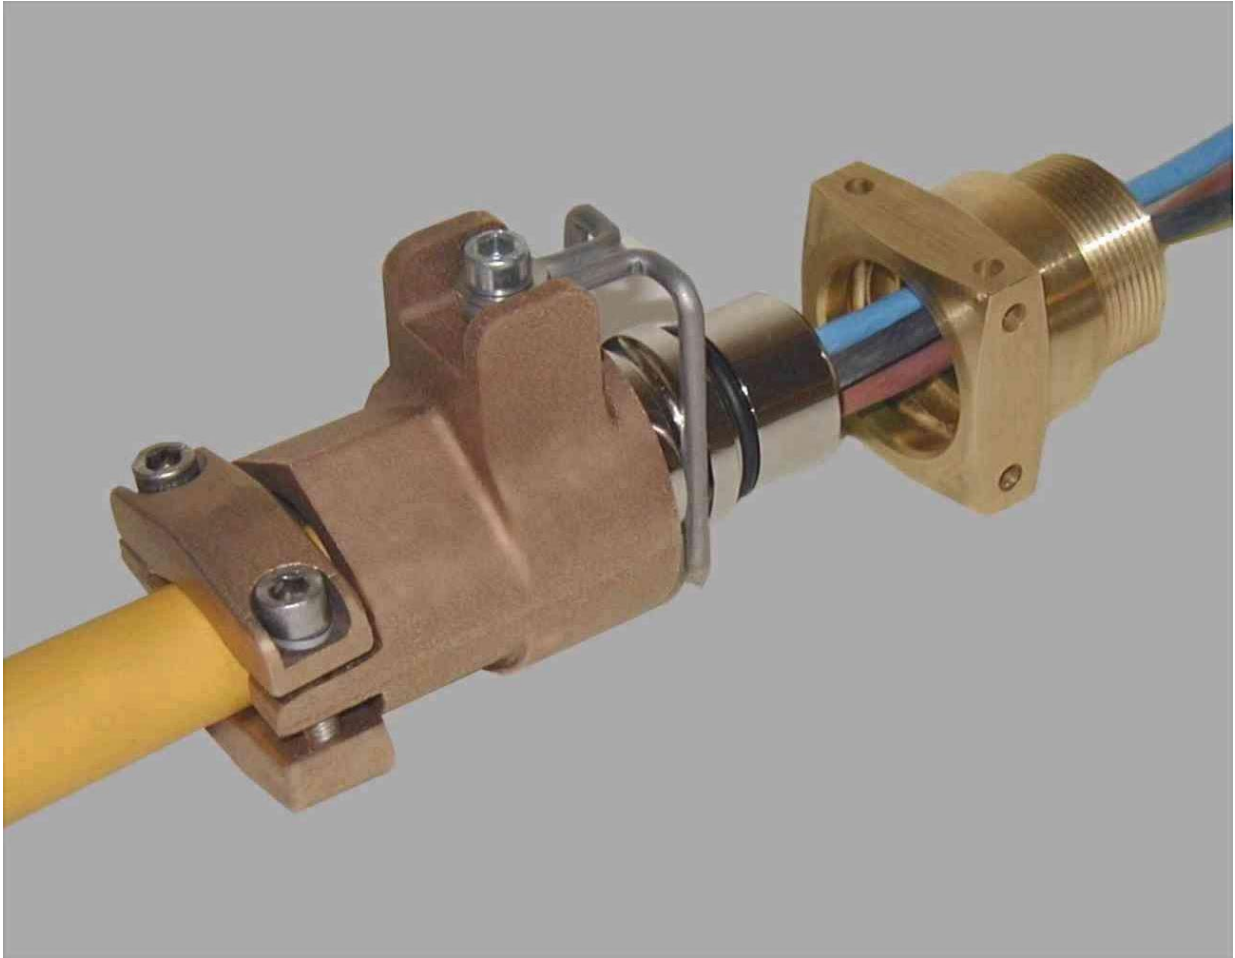

## Features

- Plug-in cable bushing for rapid and simple installation on site and any pre-connecting that is required
- Use of standard mining cables with an outer sheath of rubber or plastic and with cable diameters of 19 - 25 mm
- Lead-in part to screw into the casing wall, available with either Pg 29 or M 40 x 1.5

## Technical Data

- Built-in length in lead-in part 97 mm
- Diameter max. 70 mm
- Seal internal diameter 19, 21, 23, 25 mm
- Socket size SW 41
- Temperature range -20 to +90 °C

## Types of protection

Type of protection: I M2 EExd I ; EExdI  
Level of protection: I P 66

## Certification

IBExU01ATEX1006 X ; KDB Nr 01.E.116U